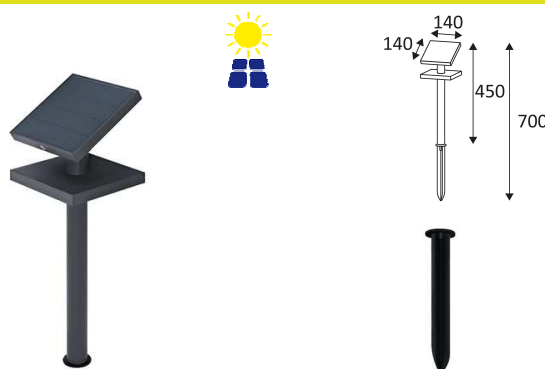




# ADES


- Terminal with solar cells and rechargeable battery.
- Works only when the luminosity is less than 20 Lux.
- With switch.
- Charging time 6 to 8 hours in full sunlight with autonomy of 7 hours.
- Stake to be buried included.


This product contains 1 light source(s) of energy efficiency D.





CODE	COLOR	MATERIAL	DC	LED	T° (K)	LED Lumen	System Lumen
OU418NW24	ANTHRACITE	CAST ALUMINIUM	DC 3,7V	1,3W	4000K	400 Lm	110 Lm


ACCESSOIRES	DESCRIPTION	
OU445	REPLACEMENT BATTERY	
OU468	REPLACEMENT GROUND SPIKE	

 Floor mounting only.


 Outdoor use.

 Protected against dust, And protected against water spray.


 Protection against an impact energy of 0,70 Joule.


 Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.


 Beam 90°.


 Product in conformity CE.


 CRI>80


 LED specifications.

 Photobiological risk RG1

 Test on 650°.

 With solar cells.

 3 years warranty.

 Replaceable LED light source by an electrician.

