


# ALA1013 RX GU10 AUTO

- Adjustable round recessed spotlight.
- Supplied with springs and louvers.
- Automatic double terminal block.
- Ring covering a drilling diameter of 90 to 120mm to be ordered separately.



CODE	COLOR	MATERIAL	SOCKET	AC	Watt Max	LAMP
DO47505	MATT BLACK	ALUMINIUM	GU10 AUTO	AC 230V	50W	PAR16
ALA101325	MATT ALUMINUM	ALUMINIUM	GU10 AUTO	AC 230V	50W	PAR16
ALA101330	MATT WHITE	ALUMINIUM	GU10 AUTO	AC 230V	50W	PAR16

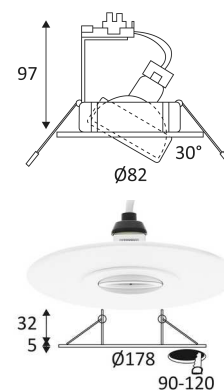

MATT BLACK



MATT ALUMINUM



MATT WHITE

ACCESSOIRES	COLOR	MATERIAL	DESCRIPTION	L (mm)
DO33305	MATT BLACK	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178
DO33330	MATT WHITE	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178

LAMPES	AC/DC	LED	T° (K)	System Lumen	LED Lumen	CRI
LED9W500DWW	AC 230V	9W	3000K	830 Lm	940 Lm	x



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 12 mm. Protected against rain.



Protection against an impact energy of 1 Joule.



Live parts are equipped with additional isolation protection, such as reinforced or double insulation.



Hole cut to insert luminaire (68mm)



The luminaire can be adjusted vertically up to a maximum of 30°.



Product in conformity CE.



Test on 650°.




Product can not be covered after installation even with insulation.



2 years warranty.





Replaceable light source by an end-user.