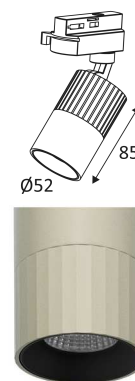


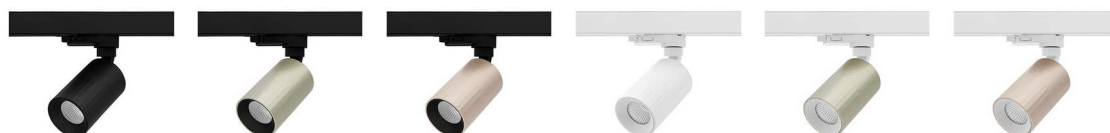
# AUREA 3 T

- Spotlight for accent lighting.
- Adapter for Track III SURFACE.
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Dimmable converter built in the device.
- Compatible with start-of-phase dinner.
- Reserve a specific phase of the track for the dimmable products.
- Exposed base TR241 to be ordered separately.



This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
TR43305	MATT BLACK	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43308	MATT BLACK - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43383	MATT BLACK - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43330	MATT WHITE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43349	MATT WHITE - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43382	MATT WHITE - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)



MATT BLACK



MATT BLACK - CHAMPAGNE












MATT BLACK - ROSE


MATT WHITE


MATT WHITE - CHAMPAGNE


MATT WHITE - ROSE


ACCESSOIRES	COLOR	DESCRIPTION	
TR24130	BLACK	SURFACE MOUNTED BASE	
TR24131	WHITE	SURFACE MOUNTED BASE	


-  Ceiling mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 0,20 Joule.
-  Earth wire . Fixture equipped with primary insulation only.
-  Vertical orientation maximum to 90°.
-  Horizontal orientation maximum to 350°.
-  Beam 38°.
-  Product in conformity CE.
-  CRI>90
-  3 CCT.  
2700K  
3000K  
4000K


 LED specifications.


 Photobiological risk RG1


 Test on 850°.


 Power supply included.

 The product is dimmable.

 5 years warranty.

 Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Replaceable control gear by an electrician.

 Replaceable LED light source by an electrician.