

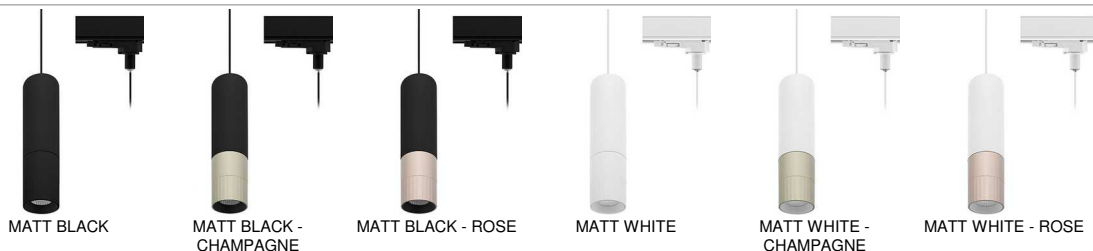
AUREA 3 TP

- Decorative hanging fixture.
- Adapter for Track III SURFACE.
- Supplied with power cable (adjustable 2.00m max).
Colour 05 - 08 - 83: black cable.
Colour 30 - 49 - 82: white cable.
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Dimmable converter built in the device.
- Compatible with start-of-phase dinner.
- Reserve a specific phase of the track for the dimmable products.



This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
TR43405	MATT BLACK	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43408	MATT BLACK - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43483	MATT BLACK - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43430	MATT WHITE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43449	MATT WHITE - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
TR43482	MATT WHITE - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)



Suspended mounting only.

Indoor use only.

Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.

Protection against an impact energy of 0,20 Joule.

Earth wire . Fixture equipped with primary insulation only.

Beam 38°.

Product in conformity CE.

CRI>90

3 CCT.
2700K
3000K
4000K

LED specifications.
L80B10
50.000h


Photobiological risk RG1


Test on 850°.


Power supply included.

The product is dimmable.

5 5 years warranty.

 Photometric data available on our website: www.indigo-lighting.com

 Replaceable control gear by an electrician.

 Replaceable LED light source by an electrician.