


AUREA 3 W

- Decorative wall lamp.
- Exposed base with dimmer switch and USB socket (5VDC, 2,4A).
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Dimmable converter built in the device.

This product contains 1 light source(s) of energy efficiency G.

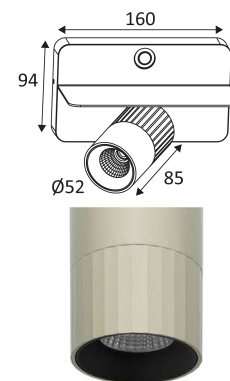

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
WA26005	MATT BLACK	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)
WA26008	MATT BLACK - CHAMPAGNE	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)
WA26083	MATT BLACK - ROSE	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)
WA26030	MATT WHITE	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)
WA26049	MATT WHITE - CHAMPAGNE	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)
WA26082	MATT WHITE - ROSE	ALUMINIUM	AC 230V	7W	2700-3000-4000K	625 Lm (4000K)	500 Lm (4000K)



MATT BLACK



MATT BLACK - CHAMPAGNE



MATT BLACK - ROSE



MATT WHITE



MATT WHITE - CHAMPAGNE



MATT WHITE - ROSE



Wall mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Vertical orientation maximum to 90°.



Horizontal orientation maximum to 180°.



Beam 38°.



Product in conformity CE.



CRI>90



3 CCT.



LED specifications.



Photobiological risk RG1



Test on 850°.



Power supply included.



With dimmer switch.




With USB plug.




5 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.