


# CAPRI R 1 P

- Suspension ronde.
- PS diffuser with prismatic structure.
- 2700K, 3000K or 4000K as desired via a switch in the luminaire.
- Supplied with steel suspension cables (adjustable up to 2.00m max), round base and white or black power cable.
- Dimmable phase cut or dimmable DALI-push converter built in the device.

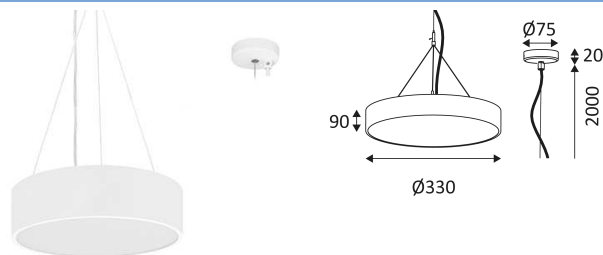

This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU15305	MATT BLACK	ALUMINIUM	AC 230V	20W	2700-3000-4000K	2400 Lm (4000K)	1360 Lm (4000K)
SU15330	MATT WHITE	ALUMINIUM	AC 230V	20W	2700-3000-4000K	2400 Lm (4000K)	1360 Lm (4000K)
SU15305DA	MATT BLACK	ALUMINIUM	AC 230V	20W	2700-3000-4000K	2400 Lm (4000K)	1360 Lm (4000K)
SU15330DA	MATT WHITE	ALUMINIUM	AC 230V	20W	2700-3000-4000K	2400 Lm (4000K)	1360 Lm (4000K)



MATT BLACK

MATT WHITE



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Beam 90°.



Product in conformity CE.



CRI>90



3 CCT.



LED specifications.



UGR below 19.



Photobiological risk RG1



Test on 650°.



Power supply included.




The product is dimmable.




5 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.