



CAPRI R 3 P

- Round hanging fixture.
- Prismatic PS diffuser.
- 2700K, 3000K or 4000K as desired via a switch in the luminaire.
- Supplied with steel hanging cables (adjustable 2.00m max), black or white round base and power cable.
- DALI dimmable converter built in the device.



This product contains 1 light source(s) of energy efficiency F.

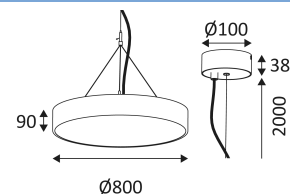



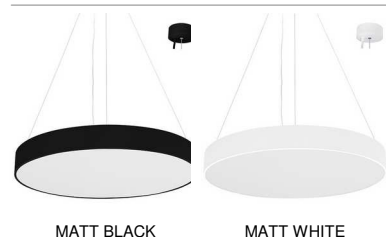









CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU15505DA	MATT BLACK	ALUMINIUM	AC 230V	105W	2700-3000-4000K	11800 Lm (4000K)	7070 Lm (4000K)
SU15530DA	MATT WHITE	ALUMINIUM	AC 230V	105W	2700-3000-4000K	11800 Lm (4000K)	7070 Lm (4000K)



ACCESSOIRES	DESCRIPTION	L (mm)
-------------	-------------	--------

CD127	DALI PCU LIGHTING MANAGEMENT	48
-------	------------------------------	----



-  Suspended mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 0,20 Joule.
-  Earth wire . Fixture equipped with primary insulation only.
-  Beam 90°.
-  Product in conformity CE.
-  CRI>90
-  3 CCT.
2700K
3000K
4000K
-  LED specifications.
L80B20
50.000h
-  UGR below 19.
-  Photobiological risk RG1
-  Test on 650°.
-  Power supply included.




The product is dimmable (DALI input).




5 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.