


CD139



CODE	Watt Max	PRI	SEC	INPUTS	OUTPUTS	Amb. T° Max.	L (mm)	l (mm)	H (mm)
CD13952	50W	DC 24V	DC 24V	1	1	40°C	65	16	13

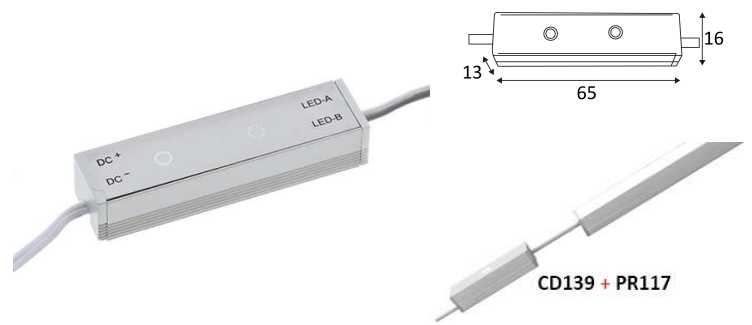

Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Product in conformity CE.



The product is dimmable.



Tunable white (2700K-6000K).



Connect to a constant voltage LED power supply of 24VDC.



2 years warranty.