


DUCA POWER


- Adjustable round recessed spotlight.
- Low luminance reflector.
- Beam reducer ring.
- Fastened with springs.
- Remote non dimmable converter supplied (DALI versions: converter with push-dim function).

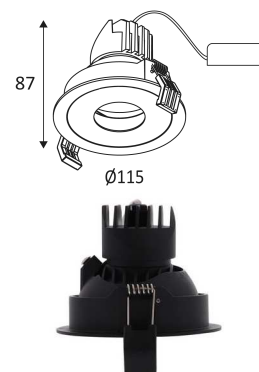

CODE	COLOR	MATERIAL	AC	DC	LED	T° (K)	LED Lumen	System Lumen	α
PHASE CUT DIMMABLE									
DO394SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	632 Lm	15°
DO394SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	632 Lm	15°
DO394WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	752 Lm	15°
DO394WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	752 Lm	15°
DO394NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	768 Lm	15°
DO394NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	768 Lm	15°
DO393SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	534 Lm	30°
DO393SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	534 Lm	30°
DO393WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	646 Lm	30°
DO393WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	646 Lm	30°
DO393NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	657 Lm	30°
DO393NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	657 Lm	30°
DO392SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	706 Lm	50°
DO392SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	706 Lm	50°
DO392WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	868 Lm	50°
DO392WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	868 Lm	50°
DO392NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	890 Lm	50°
DO392NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	890 Lm	50°
DALI DIMMABLE									
DO394SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	632 Lm	15°
DO394SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	632 Lm	15°
DO394WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	752 Lm	15°
DO394WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	752 Lm	15°
DO394NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	768 Lm	15°
DO394NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	768 Lm	15°
DO393SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	534 Lm	30°
DO393SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	534 Lm	30°
DO393WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	646 Lm	30°
DO393WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	646 Lm	30°
DO393NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	657 Lm	30°
DO393NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	657 Lm	30°
DO392SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	706 Lm	50°
DO392SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	706 Lm	50°
DO392WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	868 Lm	50°
DO392WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	868 Lm	50°
DO392NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	890 Lm	50°
DO392NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	890 Lm	50°

MATT BLACK

MATT WHITE



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 12 mm. Protected against rain.



Protection against an impact energy of 0,20 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Hole cut to insert luminaire (100mm)



The luminaire can be adjusted vertically up to a maximum of 30°.



Horizontal orientation maximum to 355°.



Product in conformity CE.



CRI>90



LED specifications.



UGR below 19.



Photobiological risk RG1



Test on 850°.



Product can not be covered after installation even with insulation.



Power supply included.



Connect to a constant current Led power supply of 350mA DC.



The product is dimmable.



5 years warranty.



Photometric data available on our website: www.indigo-lighting.com