


FOCAL

- Spotlight for accent lighting.
 - Adapter for Track III SURFACE.
 - 3000K, 3500K or 4000K as desired via a switch at the back of the luminaire.
 - Adjustable beam from 30° to 60°.
 - Non dimmable converter built in the device.
- This product contains 1 light source(s) of energy efficiency F.






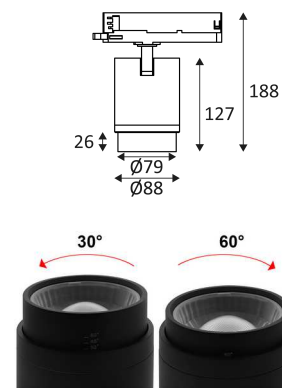















CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
TR43705	MATT BLACK	ALUMINIUM	AC 230V	32W	3000-3500-4000K	3550 Lm (4000K)	2535 Lm (4000K)
TR43730	MATT WHITE	ALUMINIUM	AC 230V	32W	3000-3500-4000K	3550 Lm (4000K)	2535 Lm (4000K)




MATT BLACK

MATT WHITE

-  Ceiling mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 1 Joule.
-  Live parts are equipped with additional isolation protection, such as reinforced or double insulation.
-  Vertical orientation maximum to 90°.
-  Horizontal orientation maximum to 355°.
-  Adjustable beam 30-60°.
-  Product in conformity CE.
-  CRI>90
-  3 CCT.
3000 K
3500 K
4000 K
-  LED specifications.
L80B10
50.000h
-  UGR below 19.
-  Photobiological risk RG1
-  Test on 850°.
-  Power supply included.
-  5 years warranty.
-  Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.