


# JUNE 2 P

- Decorative hanging fixture.
- Opaline PS diffuser.
- 2700K, 3000K or 4000K as desired via a switch in the luminaire.
- Supplied with black or white hanging cables (adjustable 1.50m max), black or white round base and power cable.
- Dimmable converter built in the device.
- Compatible with start and end-of-phase dimmer.

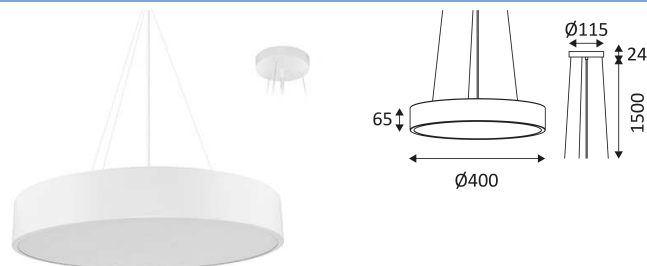

This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU15705	MATT BLACK	ALUMINIUM	AC 230V	30W	2700-3000-4000K	5600 Lm (4000K)	3325 Lm (4000K)
SU15730	MATT WHITE	ALUMINIUM	AC 230V	30W	2700-3000-4000K	5600 Lm (4000K)	3325 Lm (4000K)



MATT BLACK

MATT WHITE



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 1mm. Protected against splashing water.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Beam 120°.



Product in conformity CE.



CRI>80



3 CCT.



LED specifications.



Photobiological risk RG1



Test on 650°.



Power supply included.




The product is dimmable.




3 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.