



# LIMA 1 PLUS

- Spotlight for accent lighting.
- Adapter for Track III SURFACE.
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Non-dimmable converter built in the device.
- Use the glasses for power supply with the temperature of colour 3000K.
- Exposed base TR241 to be ordered separately.







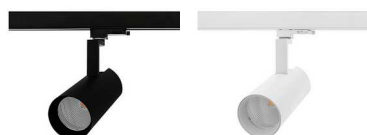



This product contains 1 light source(s) of energy efficiency G.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen	α
<b>40°</b>								
TR39505	MATT BLACK	ALUMINIUM	AC 230V	25W	2700-3000~	2550 Lm (4000K)	1760 Lm (4000K)	40°
TR39530	MATT WHITE	ALUMINIUM	AC 230V	25W	2700-3000~	2550 Lm (4000K)	1920 Lm (4000K)	40°
<b>60°</b>								
TR39605	MATT BLACK	ALUMINIUM	AC 230V	25W	2700-3000~	2550 Lm (4000K)	1760 Lm (4000K)	60°
TR39630	MATT WHITE	ALUMINIUM	AC 230V	25W	2700-3000~	2550 Lm (4000K)	1920 Lm (4000K)	60°



MATT BLACK

MATT WHITE

ACCESSOIRES	COLOR	DESCRIPTION	
TR32105	BLACK	HONEYCOMB DIA.71mm	
TR32432		GLASS FOR FOOD APPLICATION DIA.71mm	
TR32756		GLASS FOR FOOD APPLICATION DIA.71mm	
TR33058		BLADE LIGHT FILTER DIA.71mm	
TR38505	MATT BLACK	FLAP DIA.71mm	
TR38530	MATT WHITE	FLAP DIA.71mm	
TR24130	BLACK	SURFACE MOUNTED BASE	
TR24131	WHITE	SURFACE MOUNTED BASE	



Ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Vertical orientation maximum to 90°.



Horizontal orientation maximum to 350°.



Product in conformity CE.



CRI>90



3 CCT.



LED specifications.



Photobiological risk RG1



Test on 850°.




Power supply included.




5 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.