



# LINEAR 1 C

- Linear ceiling lamp.
  - Low luminance reflector.
  - 3000K, 3500K or 4000K as desired via a switch at the back of the luminaire.
  - Non dimmable or dimmable DAL-push converter built in the device.
  - Up to 25 luminaires can be connected on line.
  - Mechanical linear connection to be ordered separately. Fast electrical connections included in the luminaire.
- This product contains 192 light source(s) of energy efficiency E.



CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
CL10005	MATT BLACK	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	2890 Lm (4000K)
CL10017	MATT BLACK - SILVER	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4580 Lm (4000K)
CL10030	MATT WHITE	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4770 Lm (4000K)
CL10053	MATT WHITE - SILVER	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4580 Lm (4000K)
CL10005DA	MATT BLACK	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	2890 Lm (4000K)
CL10017DA	MATT BLACK - SILVER	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4580 Lm (4000K)
CL10030DA	MATT WHITE	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4770 Lm (4000K)
CL10053DA	MATT WHITE - SILVER	ALUMINIUM	AC 230V	38W	3000-3500-4000K	6625 Lm (4000K)	4580 Lm (4000K)

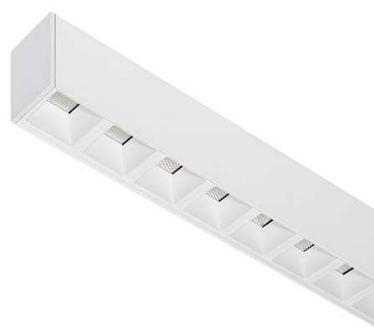


MATT BLACK



MATT BLACK - SILVER



















MATT WHITE




MATT WHITE - SILVER

ACCESSOIRES	COLOR	MATERIAL	DESCRIPTION
CL10220		ALUMINIUM	MECHANICAL CONNECTION
CL10405	MATT BLACK	ALUMINIUM	ELECTRIFIED MODULE 120cm
CL10430	MATT WHITE	ALUMINIUM	ELECTRIFIED MODULE 120cm
CL10505	MATT BLACK	ALUMINIUM	CONNECTION L
CL10530	MATT WHITE	ALUMINIUM	CONNECTION L
CL10605	MATT BLACK	ALUMINIUM	CONNECTION T
CL10630	MATT WHITE	ALUMINIUM	CONNECTION T
CL10705	MATT BLACK	ALUMINIUM	CONNECTION X
CL10730	MATT WHITE	ALUMINIUM	CONNECTION X



-  Ceiling mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 1 Joule.
-  Earth wire . Fixture equipped with primary insulation only.
-  Beam 75°.
-  Product in conformity CE.
-  Colour rendering index >80.
-  Selectable colour temperature.  
3000 K  
3500 K  
4000 K
-  LED specifications.  
L80B10  
50.000h
-  UGR below 19.
-  Photobiological risk RG1
-  Test on 650°.
-  Power supply included.
-  5 years warranty.
-  Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Replaceable control gear by an electrician.

 Non-replaceable light source.