


# MINI VARA

- Portable luminaire.
- With switch and rechargeable battery via USB socket.
- Charging time 6 hours with autonomy of 9 hours.
- Supplied with charger.
- Dimmable.

This product contains 1 light source(s) of energy efficiency E.

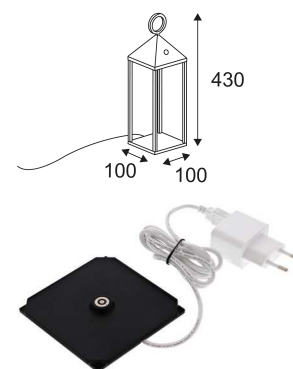

| CODE      | COLOR      | MATERIAL       | DC      | LED | T° (K) | LED Lumen | System Lumen |
|-----------|------------|----------------|---------|-----|--------|-----------|--------------|
| OU422WW24 | ANTHRACITE | CAST ALUMINIUM | DC 3,7V | 2W  | 3000K  | 580 Lm    | 150 Lm       |
| OU422WW30 | MATT WHITE | CAST ALUMINIUM | DC 3,7V | 2W  | 3000K  | 580 Lm    | 150 Lm       |



ANTHRACITE



MATT WHITE

| ACCESSOIRES | COLOR      | DESCRIPTION                 |  |
|-------------|------------|-----------------------------|--|
| OU42024     | ANTHRACITE | WALL HOOK                   |  |
| OU42030     | MATT WHITE | WALL HOOK                   |  |
| OU42124     | ANTHRACITE | SUSPENSION 2m               |  |
| OU42130     | MATT WHITE | SUSPENSION 2m               |  |
| OU42304     | WHITE      | MULTI USB CHARGER (8 PORTS) |  |



Mobile.



Indoor and outdoor use.



Protected against dust, And protected against water spray.



Protection against an impact energy of 0,20 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Product in conformity CE.




CRI>80





LED specifications.





Photobiological risk RG1

 Test on 650°.

 Rechargeable battery via USB plug.

 With dimmer switch.

 3 years warranty.

 Replaceable LED light source by an electrician.