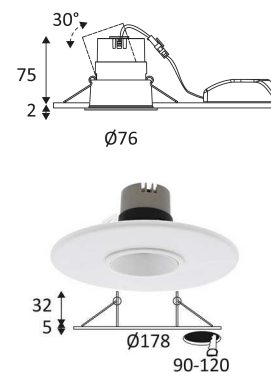


# SILK RDX

- Adjustable round recessed spotlight.
- Low luminance reflector.
- Fastened with springs.
- Can be covered with peeled insulation.
- Automatic double terminal block.
- Remote dimmable converter supplied.
- Compatible with end-of-phase dimmer.
- Ring covering a drilling diameter of 90 to 120mm to be ordered separately.



This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	DC	LED	T° (K)	LED Lumen	System Lumen
DO501WW05	MATT BLACK	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	490 Lm
DO501WW08	MATT BLACK - CHAMPAGNE	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	490 Lm
DO501WW17	MATT BLACK - SILVER	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	490 Lm
DO501WW06	MATT BLACK - ROSE GOLD	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	490 Lm
DO501WW30	MATT WHITE	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	510 Lm
DO501WW49	MATT WHITE - CHAMPAGNE	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	510 Lm
DO501WW53	MATT WHITE - SILVER	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	510 Lm
DO501WW02	MATT WHITE - ROSE GOLD	CAST ALUMINIUM	DC 350mA 18V	6W	3000K	630 Lm	510 Lm



MATT BLACK



MATT BLACK - CHAMPAGNE



MATT BLACK - SILVER



MATT BLACK - ROSE GOLD



MATT WHITE



MATT WHITE - CHAMPAGNE



MATT WHITE - SILVER



MATT WHITE - ROSE GOLD

ACCESSOIRES	COLOR	MATERIAL	DESCRIPTION	L (mm)
DO33305	MATT BLACK	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178
DO33330	MATT WHITE	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 1mm. Protected against splashing water.



Protection against an impact energy of 0,20 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Hole cut to insert luminaire (68mm)



Minimum ceiling height to insert luminaire. (75mm)



The luminaire can be adjusted vertically up to a maximum of 30°.



Beam 36°.



Product in conformity CE.



**CRI**  
CRI>90

**LED**  
L80B20  
50,000h

LED specifications.

**UGR**  
<19


UGR below 19.


**RG1**

Photobiological risk RG1

**650°**

Test on 650°.

 Product can be covered after installation with insulation. (not blown)

 Power supply included.

**350 mA**


Connect to a constant current Led power supply of 350mA DC.


**DIM**


The product is dimmable.

**5**

5 years warranty.

 Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Replaceable control gear by an electrician.

 Replaceable LED light source by an electrician.