


SILK RDX WARM

- Adjustable round recessed spotlight.
- Low luminance reflector.
- Fastened with springs.
- Can be covered with peeled insulation.
- Automatic double terminal block.
- Variable colour temperature from 2000K to 3000K depending on dimming intensity.
- Remote dimmable converter supplied.
- Compatible with end-of-phase dimmer.
- Ring covering a drilling diameter of 90 to 120mm to be ordered separately.

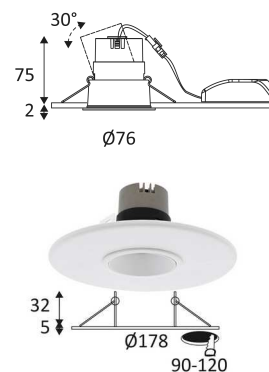

This product contains 1 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	DC	LED	T° (K)	LED Lumen	System Lumen
DO50205	MATT BLACK	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	410 Lm (3000K)
DO50208	MATT BLACK - CHAMPAGNE	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	410 Lm (3000K)
DO50217	MATT BLACK - SILVER	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	410 Lm (3000K)
DO50206	MATT BLACK - ROSE GOLD	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	410 Lm (3000K)
DO50230	MATT WHITE	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	430 Lm (3000K)
DO50249	MATT WHITE - CHAMPAGNE	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	430 Lm (3000K)
DO50253	MATT WHITE - SILVER	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	430 Lm (3000K)
DO50202	MATT WHITE - ROSE GOLD	CAST ALUMINIUM	DC 350mA 18V	6W	2000-3000K	530 Lm (3000K)	430 Lm (3000K)



MATT BLACK



MATT BLACK - CHAMPAGNE



MATT BLACK - SILVER



MATT BLACK - ROSE GOLD



MATT WHITE



MATT WHITE - CHAMPAGNE



MATT WHITE - SILVER



MATT WHITE - ROSE GOLD

ACCESSOIRES	COLOR	MATERIAL	DESCRIPTION	L (mm)
DO33305	MATT BLACK	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178
DO33330	MATT WHITE	ALUMINIUM	RING FOR CUTTING HOLE 90-120mm	178



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 1mm. Protected against splashing water.



Protection against an impact energy of 0,20 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Hole cut to insert luminaire (68mm)



Minimum ceiling height to insert luminaire. (75mm)



The luminaire can be adjusted vertically up to a maximum of 30°.



Beam 36°.





Product in conformity CE.



CRI>90



LED specifications.



UGR below 19.



Photobiological risk RG1



Test on 650°.



Product can be covered after installation with insulation. (not blown)



Power supply included.



Connect to a constant current Led power supply of 350mA DC.




Dim to warm from 2000K to 3000K.




5 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.