


TIMY SENSOR

- Wall or ceiling lamp for indoor and outdoor lighting.
- 3000K or 4000K as desired via a switch in the luminaire.
- With 360° HF sensor, adjustable detection area max. 10m in diameter
- With anti-vandal spanner and screw.
- Non dimmable converter built in the device.

This product contains 1 light source(s) of energy efficiency F.

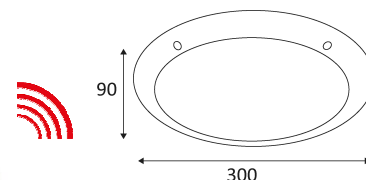

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
OU13920	METAL	POLYCARBONATE	AC 230V	25W	3000-4000K	2350 Lm (4000K)	1935 Lm (4000K)
OU13930	BLACK	POLYCARBONATE	AC 230V	25W	3000-4000K	2350 Lm (4000K)	1935 Lm (4000K)
OU13931	WHITE	POLYCARBONATE	AC 230V	25W	3000-4000K	2350 Lm (4000K)	1935 Lm (4000K)



















METAL





BLACK



WHITE

-  Wall and ceiling mounting only.
-  Indoor and outdoor use.
-  Protected against penetration of dust
Protected against water jets.
-  Protection against an impact energy of 50 Joules.
-  Live parts are equipped with additional isolation protection, such as reinforced or double insulation.
-  Product in conformity CE.
-  CRI >80
-  2 CCT.
3000 K
4000 K
-  LED specifications.
-  Photobiological risk RG0
-  Test on 850°.
-  Vandal-resistant.
-  Power supply included.
-  With sensor.
-  3 years warranty.
-  Photometric data available on our website: www.indigo-lighting.com

-  Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.