


# TOMY 2 P

- Linear hanging fixture.
- UP, down or up and down lighting as desired with a switch at the back of the luminaire.
- Low luminance reflector (down lighting) and polycarbonate diffuser (up lighting).
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Supplied with black or white hanging cables (adjustable 2.00m max), black or white round base and power cable.
- Non-dimmable converter built in the device.

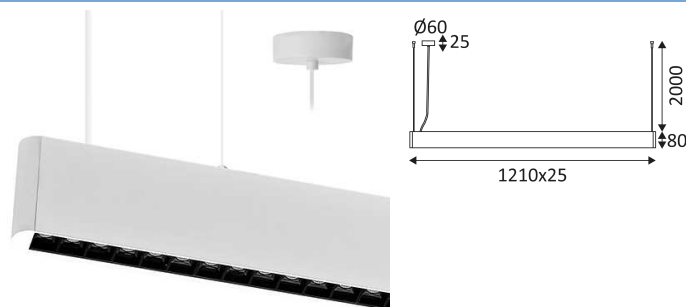

This product contains 132 light source(s) of energy efficiency F.

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen	α
SU15905	MATT BLACK	ALUMINIUM	AC 230V	2x36W	2700-3000-4000K	4100+3800 Lm (4000K)	2835+2430 Lm (4000K)	36° / 100°
SU15930	MATT WHITE	ALUMINIUM	AC 230V	2x36W	2700-3000-4000K	4100+3800 Lm (4000K)	2835+2430 Lm (4000K)	36° / 100°



MATT BLACK

MATT WHITE



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Live parts are equipped with additional isolation protection, such as reinforced or double insulation.



Beam 36°.



Beam 100°.



Product in conformity CE.



CRI>80



3 CCT.



LED specifications.



Photobiological risk RG1



Test on 650°.




Power supply included.




5 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)



Non-replaceable control gear.



Non-replaceable light source.