
















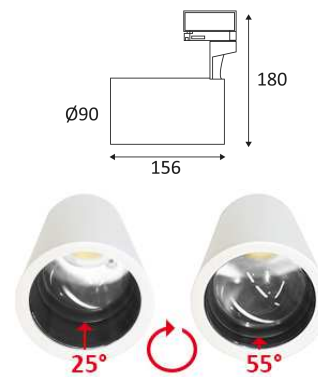

# ZOOM




CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
TR130WW30		USD	AC 230V	25W	3000K	2650 Lm	1864 Lm (35°)
TR130NW05	300	USD	AC 230V	25W	4000K	2800 Lm	1994 Lm (35°)



BLANC

-  Ceiling mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 0,20 Joule.
-  Earth wire . Fixture equipped with primary insulation only.
-  Vertical orientation maximum to 90°.
-  Horizontal orientation maximum to 330°.
-  Adjustable beam 25-55°.
-  Product in conformity CE.
-  Colour rendering index >90.
-  LED specifications.
-  Photobiological risk RG1
-  Test on 650°.
-  Power supply included.
-  3 years warranty.
-  Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Non-replaceable light source.



Non-replaceable control gear.